

NEW

PiLoTREK WP-200

INTEGRATED 80 GHz (W-BAND) RADAR
FOR LIQUIDS & SOLIDS



5 YEARS WARRANTY

NIVELCO

LEVEL TRANSMITTERS



FEATURES

- 2-wire 80 GHz (W-band) radar
- Measuring range up to 30 m (98.5 ft) for liquids
- Accuracy of ± 2 mm (0.078")
- Easy to install due to small antenna diameter
- 1", 1½" encapsulated horn antenna
- Integrated design with IP68 protection
- User-friendly threshold management
- Configuration via Bluetooth® with MobileEView app*
- Ex variant*
- Measurement through a plastic tank roof
- For material prone to vapor formation
- For measuring liquids with a gas blanket
- It can also be used in a vacuum
- Open-channel flow measurement

APPLICATIONS

- For measuring the level of liquids, emulsions, and other media up to 30 m (98.5 ft)
- For large-particle bulk solids
- Storage tanks, chemical tanks, open pits, sumps, wells

AREAS OF APPLICATION

- Water and Wastewater Industry
- Energy industry / Plant utilities
- Food & Beverage
- Pharmaceutical Industry
- Chemical Industry
- Marine applications
- Agriculture
- Construction materials
- Heavy Industry
- Packaging Industry

* Under development

The new **PiloTREK WP-200** non-contact radar level transmitters use the most advanced industrial measurement technology, the 80 GHz FMCW radar. The most fundamental advantage of 80 GHz radars compared to lower frequencies (5...12 GHz and 25 GHz) is the smaller antenna size, better focusability, and narrow beam angle. It uses the latest technology for measuring liquids, masses, emulsions, and other chemicals widely used in, for example, the water industry, food industry, energy industry, pharmaceutical industry, and chemical industry, which provides measurement results with millimeter accuracy.

It is also excellent for measuring substances prone to vapor formation and liquids with gas blanket or large-particle bulk solids. In addition to the level, volume, and weight measurement functions, this product family also inherits the open-channel flow measurement functions and the threshold functions to eliminate false and interfering echoes introduced in connection with ultrasonic devices. Since no medium is required for millimeter waves to propagate, it can also be used in a vacuum.

The device can also be operated with HART® compliant NIVELCO **EView2**, **MultiCONT** universal process controller, and **PACTware** software, or programmed via Bluetooth® communication with the new **MobileEView*** app.

OPERATING PRINCIPLE

The reflection of the millimeter-waves is highly dependent on the dielectric constant of the medium. Therefore, the measured medium's dielectric constant (ϵ_r) must be over 1.9 for millimeter-wave level measurement. The measurement principle of a level transmitter with a millimeter-waves signal is based on measuring the reflection's time of flight.

The speed of propagation of millimeter-waves signals in the air, gases, and vacuum is almost constant regardless of temperature and medium pressure, so the measured distance does not depend on the physical parameters of the intermediate medium.

The **PiloTREK WP-200** level transmitter is a continuous-wave frequency modulated radar (FMCW) operating at 80 GHz (W-band). The most obvious advantages of 80 GHz radars over lower frequency (5...12 & 25 GHz) radars are smaller antenna size, better focus, and smaller beam angle. A portion of the millimeter-wave continuous wave energy radiated by the level transmitter antenna is reflected from the measured surface, depending on the material to be measured. The distance of the reflecting surface is calculated with high accuracy by the electronics from the frequency shift of the reflected signal and converted into a distance, level, or volume signal by the electronics.

Informative ϵ_r values			
Butane (C ₄ H ₁₀)	1.4	Ethers	4.4
LP gas	1.6...1.9	Acetic acid (CH ₃ COOH)	6.2
Kerosene		Limestone	6.1...9.1
Crude Oil	2.1	Ammonia (NH ₃)	17...26
Diesel Oil		Acetone (C ₃ H ₆ O)	21
Benzol (C ₆ H ₆)	2.2	Ethyl alcohol (C ₂ H ₅ OH)	24
Gasoline	2.3	Methyl alcohol (CH ₃ OH)	33.1
Bitumen	2.6	Glycol (C ₂ H ₄ O ₂)	37
Carbon disulfide (CS ₂)		Nitrobenzene (C ₆ H ₅ NO ₂)	40
Clinker	2.7	Glycerin (C ₃ H ₈ O ₃)	41.1
Resin	2.4...3.6	Water (H ₂ O)	80
Cereal Grain	3...5	Sulphuric acid (H ₂ SO ₄) (T = 20 °C [+68 °F])	84

TECHNICAL DATA

PiloTREK WP□-2□□-□		
Measured values	Distance; calculated values: level, volume, mass, flow	
Signal frequency	77...81 GHz (W-band)	
Measuring range*	0...30 m (0...98.5 ft)	
Minimum beam angle*	7°	
Lowest ϵ_r of medium*	1.9	
Resolution	1 mm (.039")	
Supply voltage	12...36 V DC	
Output	Analog	4...20 mA (3.9...20.5 mA); $R_{Tmax} = (U_s - 12 V) / 0.02 A$
	Digital	Bluetooth® (under development), HART® interface, loop resistance $\geq 250 \Omega$
	Relay (optional)	SPDT 30 V / 1 A DC; 48 V / 0.5 A AC
	Service interface	SAT-504-3 compatible; galvanically isolated; 3.3 V LVDS; max. 100 mA
Measuring frequency	$\sim 1 s$	
Antenna diameter*	1" (25.4 mm), 1½" (38.1 mm)	
Antenna material*	Encapsulated horn antenna (PP / PVDF / PTFE)	
Process temperature	-40...+80 °C (-40...+176 °F)	
Ambient temperature		
Process pressure	-1...3 bar (-14.5...43.5 psi)	
Process connection	1", 1½" BSP / NPT	
Ingress protection	IP68	
Electrical connection	4 x 0.5 mm ² shielded Ø6 mm cable x 5 m (up to 30 m); For relay option: 7 x 0.5 mm ² shielded cable [4x AWG22 shielded Ø0.24" cable x 16.4 ft (up to 98.5 ft); For relay option: 7x AWG22 shielded cable]	
Electrical protection	Overvoltage Class 1; (Class III [SELV])	
Housing material*	Plastic (PP / PVDF)	

*depending on order code

TYPE-DEPENDENT DATA

	WP□-212-□ WP□-213-□	WP□-214-□ WP□-215-□	WP□-224-□ WP□-225-□
Dead zone ⁽¹⁾	0 m		
Maximum measuring range ⁽²⁾	10 m (33 ft)		20 m (66 ft)
Accuracy ⁽³⁾	$\pm 5 \text{ mm}$ (.197")		$\pm 2 \text{ mm}$ (.078")
Beam angle (-3 dB)	12°		7°
Antenna insertion length ⁽⁴⁾	56 mm (2.2")		70 mm (2.75")
Lower process connection	1" BSP / NPT		1½" BSP / NPT
Upper process connection	1" BSP		

⁽¹⁾ Measured from the tip of the antenna.


⁽³⁾ In the case of an ideal reflecting surface.

⁽²⁾ May be limited in the case of low dielectric constant or non-perpendicular or non-planar media.


⁽⁴⁾ Measured from the sealing plane of the process connection.

HART® MULTIDROP LOOP

MultiCONT multichannel process controllers process and display measurement data supplied by NIVELCO's HART® equipped transmitters in a Multidrop loop. Connected transmitters can be programmed through MultiCONT, and it can also perform data logging tasks. Processed data may be sent to a PC via RS485 and displayed in NIVISON.

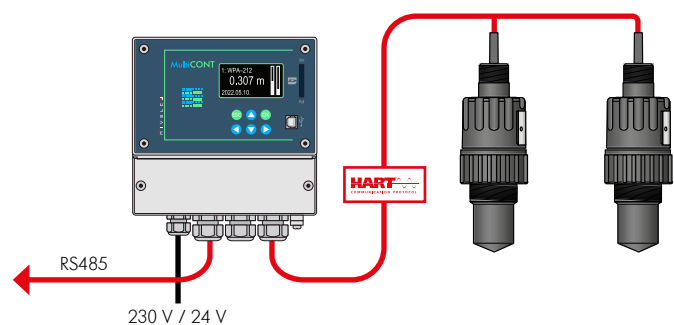


Bluetooth® CONNECTIVITY

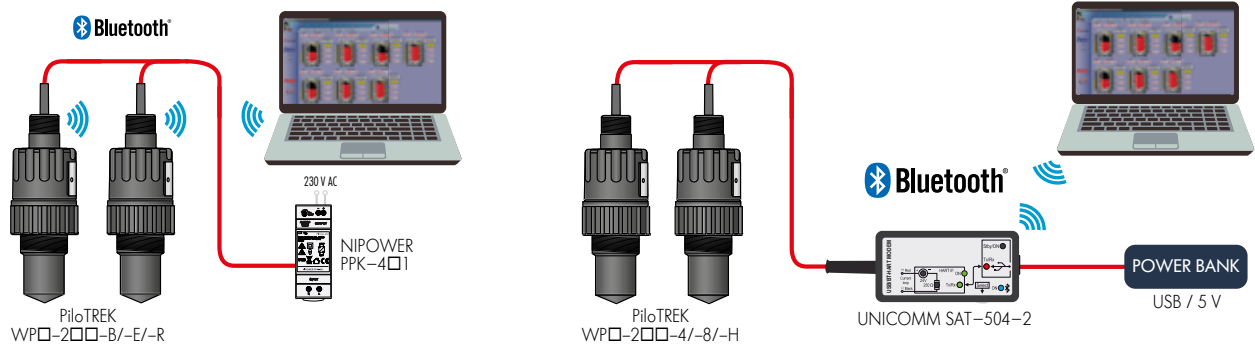


PilotREK WP-200 level transmitter can be connected to a PC or cell phone via Bluetooth® wireless technology. WP□-2□□-B/-E/-R devices can be connected directly, and WP□-2□□-4/-8/-H devices can be connected using a UNICOMM SAT-504-2 modem.

DIMENSIONS

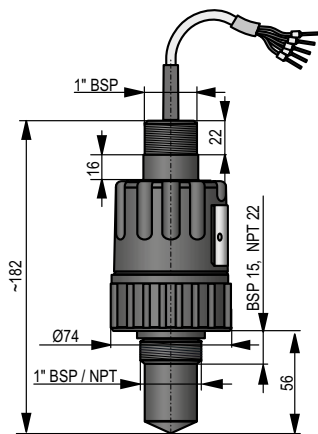

WP□-212-□, WP□-213-□

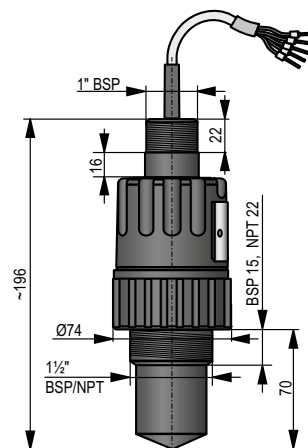

WP□-2□4-□, WP□-2□5-□

ORDER CODES (NOT ALL COMBINATIONS AVAILABLE)

Advanced 80 GHz radar level transmitters

PilotREK WP □ - 2 □ □ - □


Integrated type	Antenna / Housing material	Code	80 GHz	Measurement distance	Code	Process connection - lower / upper	Code	Output / Ex	Code	
	PP / PP	A		10 m	1	1" BSP / 1" BSP ⁽²⁾	2	4...20 mA + HART®	4	
	PVDF / PVDF ⁽¹⁾	B		20 m	2	1" NPT / 1" BSP ⁽²⁾	3		Ex ia ⁽¹⁾	8
	PTFE / PVDF	T		30 m ⁽¹⁾	3	1 1/2" BSP / 1" BSP ⁽³⁾	4		+ Relay	H
						1 1/2" NPT / 1" BSP ⁽³⁾	5		+ Bluetooth® ⁽¹⁾	B
						2" BSP / 1" BSP ^(1,4)	6		+ Bluetooth® / Ex ia ⁽¹⁾	E
						2" NPT / 1" BSP ^(1,4)	7		+ Relay + Bluetooth® ⁽¹⁾	R
						Ø75 mm / 1" BSP ^(1,5)	8			

⁽¹⁾ Under development
⁽²⁾ 10 m (33 ft) measuring range
⁽³⁾ 10 m or 20 m (33 ft or 66 ft) measuring range
⁽⁴⁾ 20 m (66 ft) measuring range
⁽⁵⁾ 30 m (98.5 ft) measuring range



PiloTREK

PULSE BURST RADAR LEVEL TRANSMITTERS
K-BAND RADAR FOR LIQUIDS

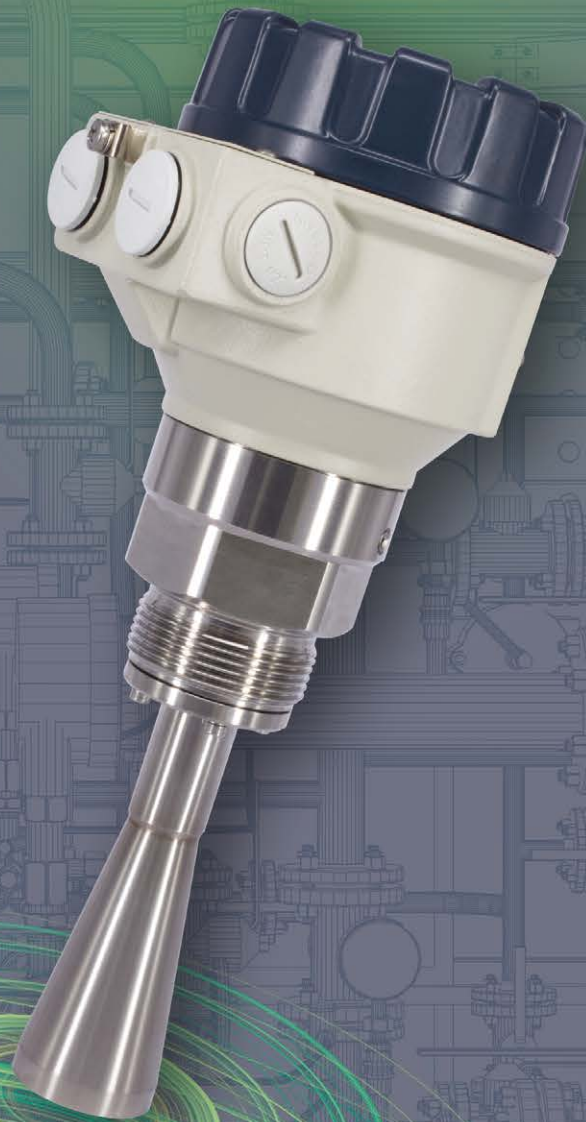

5 YEARS WARRANTY

LEVELCO

LEVEL TRANSMITTERS

MAIN FEATURES


- 2-wire K-band Pulse Burst Radar
- 25 GHz frequency
- Max. 23 m (75 feet) measuring range for liquids and slurries
- ±3 mm (0.12 inch) accuracy
- Easy installation due to small antennas
- Parabolic, horn, planar and enclosed antenna types
- IP68 rated integrated type
- Sanitary types for meeting high hygienic requirements
- High temperature version
- Plug-in graphical display module
- Ex version
- FM & CSA approved

GENERAL DESCRIPTION

The 25 GHz (K-band) **PiloTREK** Pulse Radars are regarded as the most progressive non-contact level transmitters of the industrial process automation field. Their accuracies are excellent and their short and narrow antennas make their installation simple and low cost. **NIVELCO**'s K-band radar featuring ±3 mm (0.12 inch) accuracy and short dead band excels with its versatile housing concept lining up plastic, aluminium and stainless steel versions. Its antenna range incorporates stainless steel horn or parabolic planar antenna and enclosed plastic tube varieties. The enclosed antenna versions can be replaced without removing the antenna enclosure from the process. Local programming of the **PiloTREK** is aided by a plug-in display module. If on-site reading is not desired this module may not be required thus reducing cost of ownership. The signal processing algorithm of the **PiloTREK** is based on **NIVELCO**'s 35 years of experience with non-contact level measurement making it an excellent choice for applications simple and challenging alike.

OPERATION

The operation of the non-contact microwave level transmitters is based on the measurement of the time of flight of the microwave burst. The propagation speed of microwave impulses is practically the same in air, gases and in vacuum, independently from the process temperature and pressure, so the measured distance is not affected by the physical parameters of medium to be measured. The level transmitter induces microwave impulses a few nanosecond long in the antenna and a part of the energy of the emitted signals is bounced (reflected) back from the measurement surface depending on the measured media. The time of flight of the reflected signal is measured and processed by the electronics, and then this is converted to distance, level or volume proportional data. The measurability of the level of a specific medium is depending on the signal strength of the reflected microwave impulses. The signal strength of the reflected impulses is considerably depending on the distance to be measured, the relative dielectric constant of the measured medium and the turbulence of the surface. The relative dielectric constant (ϵ_r) of the medium should be more than 1.4 in case of parabolic design, or it should be more than 1.9 with horn antenna types.

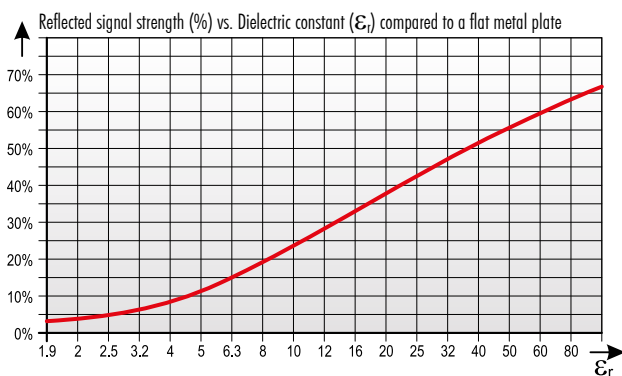

INDUSTRY SEGMENTS

- Water, wastewater
- Power generation
- Food and beverage
- Pharmaceutical
- Chemical

APPLICATIONS

- Level measurement of liquids, slurries, emulsions and other chemicals up to 23 m (75 feet)
- For mid / large-size vessels, chemical tanks
- Level measurement through plastic tank wall


Informative ϵ_r values

Petroleum	2.1	Acetone	21
Crude oil		Ethyl alcohol	24
Diesel oil		Ethanol	25.1
Benzene	2.2	Methyl alcohol	33.1
Gasoline	2.3	Methanol	33.7
Bitumen	2.6	Glycol	37
Carbon disulfide		Nitrobenzene	40
Ethers	4.4	Glycerol	41.1
Acetic acid	6.2	Water	80
Ammonia	17 – 26	Sulphuric acid (T=20 °C)	84

ANTENNA TYPES


Antenna type	Antenna diameter					
	DN40 (1½")		DN50 (2")	DN80 (3")	DN150 (6")	48 mm (1.9 inch)
	Process connection					
	1½" BSP/NPT	2" TRICLAMP	DN50 MILCH	2" BSP/NPT	DN80, DN150 flanges	2" BSP/NPT
Stainless steel (1.4571 / 316Ti) horn	■	—	—	■	■	—
Plastic (PP) enclosure	■	—	—	■	—	—
Plastic (PTFE) enclosure	■	■	■	■	—	—
Stainless steel (1.4571 / 316Ti) parabolic	—	—	—	—	■	—
Planar 2" (PP) enclosure	—	—	—	—	—	■

SPECIAL DATA OF THE ANTENNA VARIATIONS

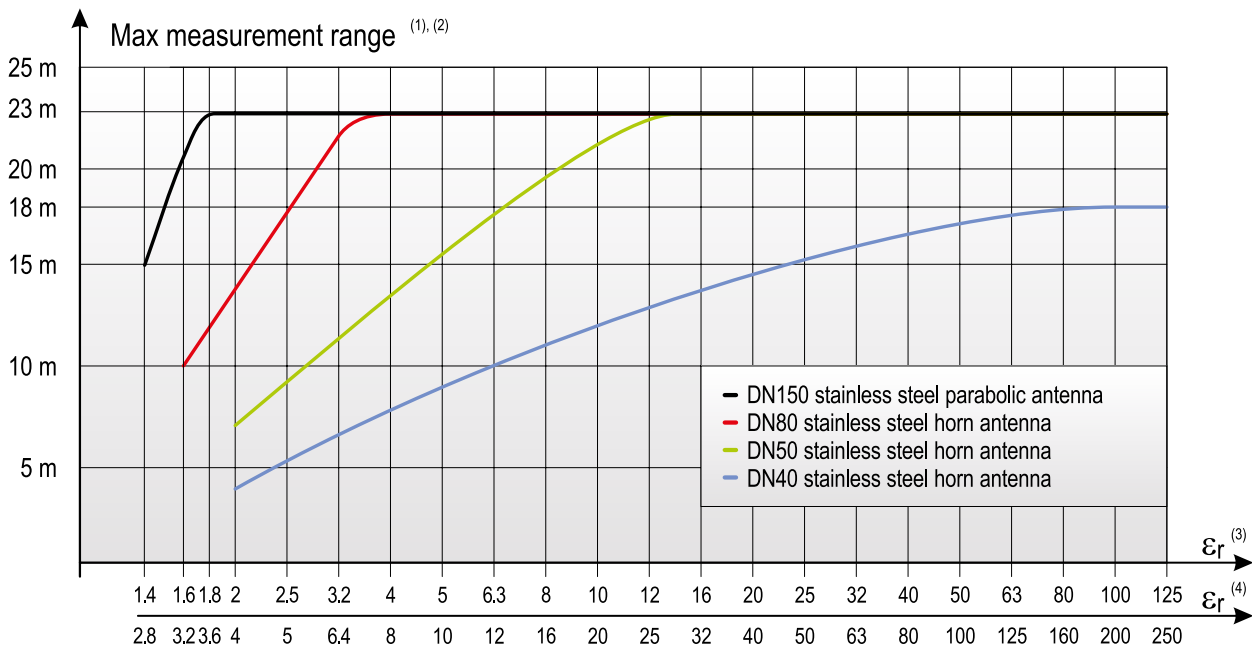

- (1) Under reference conditions of reflection (as per EN 61298-3, moreover in case of interference-free environment, from min. 10 m² target surface) and stabilized temperature. The plastic antenna enclosures result 10% (PTFE) or 20% (PP) decrease in the maximal measurement range!
- (2) In some instances (e.g. disturbing reflections, steam or gas condensation, EMC noises) the maximal measurement range might decrease by 50%!
- (3) Dielectric constant (ϵ_r) of liquids used in storage tanks with flat liquid surface
- (4) Dielectric constant (ϵ_r) of liquids used in process tanks or where liquid surface is waving

PROGRAMMING, ECHO MAP




With the help of the **SAP-300** plug-in display a simplified full-parameter programming can be accomplished, the parameters of measurement and output can be set using the text-based menu system.

The large LCD dot-matrix display displays the measured values in numerical and bar graph form. The Echo Map feature helps to detect false reflections and aids the optimization of the measurement configuration.

BACKGROUND MAPPING

The background mapping feature provides excellent solution to ignore unwanted false reflections coming from (not-moving) disturbing objects. For this purpose the instrument needs to map the totally empty tank to create a "background image". Then the measurement evaluation software of **PiLoTREK** will automatically recognise and ignore the false reflections coming from the disturbing objects inside the tank.


PiLoTREK TRANSMITTERS IN SYSTEM WITH A PC

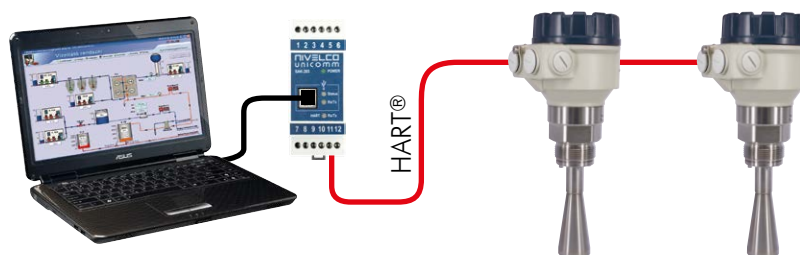


The instruments with HART® output can be connected to a PC using a **UNICOMM** HART®-USB modem. Max. 15 normal instruments can be connected to a single HART® loop. All measured values can be visualized and/or the instruments can be remote programmed via digital HART® communication.

Applicable software: **EView2** configuration software or **NIVISION** process visualization software.

WIRING

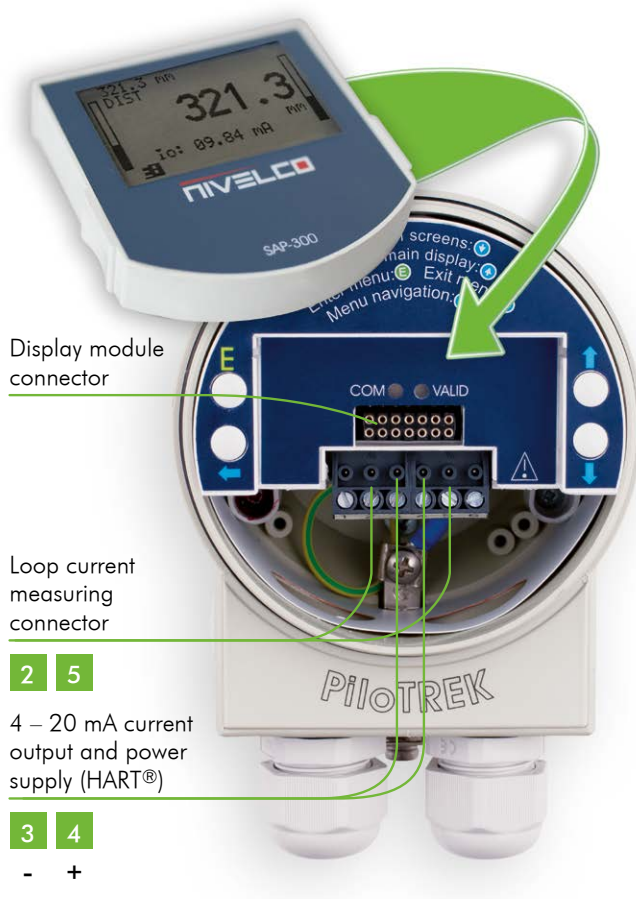

- 2 5**
4 – 20 mA current output and power supply (HART®)
- 3 4**
- +

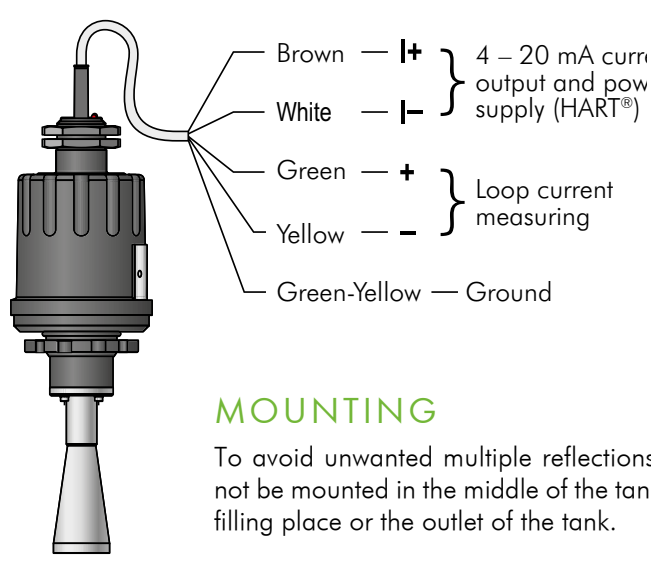

MOUNTING

To avoid unwanted multiple reflections the instrument should not be mounted in the middle of the tank or in the vicinity of the filling place or the outlet of the tank.


The ideal position for the **PiLoTREK** is on the $r = (0.3 - 0.5) R$ in case of vertical cylindrical tank. The distance between the sensor and the tank wall should be at least 200 mm (7 7/8"). The mounting placement should be as far as possible from the disturbing objects inside the tank and from the sources of disturbing effects such as waving, vortex or strong vibrations.

The antenna face should be parallel to the medium surface within $\pm 2 - 3^\circ$. To avoid overheating the instrument should be protected against direct sunshine.




WIRING FOR CLASS I DIV 2 RATED DEVICES

Electrical data:
 $C_i \leq 16 \text{ nF}$ $L_i \leq 0.2 \text{ mH}$ $I_i \leq 22 \text{ mA}$ $U_i \leq 35 \text{ V d.c}$

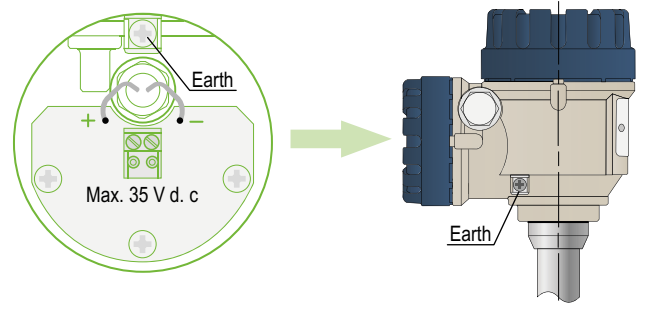

WIRING FOR CLASS I DIV 1 RATED DEVICES

Maximal allowed input voltage:
 $U_{\text{max}} = 35 \text{ V d.c}$ $U_m = 250 \text{ V}$

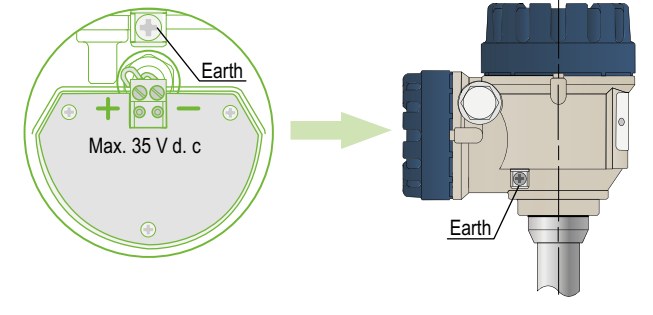

TECHNICAL DATA

Type	Integrated	Compact		
		Plastichousing	Metal housing	Hightemperatureversion
Measured values	Level, Distance; Calculated values: Volume, Mass			
Frequency of the measurement signal	~25 GHz (K-band)			
Measuring range	0.2 m – 23 m (0.6 ft – 75 ft) (depending on the antenna type – see: special data of the antenna variations)			
Linearity error (1)	<0.5 m (1.65 ft): ±25 mm (±1 in); 0.5 – 1 m (1.65 – 3.3 ft): ±15 mm (±0.6 in); 1m – 1.5 m (3.3 – 5 ft): ±10 mm (±0.4 in); 1.5 – 8 m (5 – 26.25 ft): ±3 mm (±0.12 in); >8 m (26.25 ft): ±0.04% of the measured distance			
Minimal beam angle	11° (depending on the antenna type)	6° (depending on the antenna type; see: special data of the antenna variations)		
Minimal ϵ_r of the medium	1.9 (depending on the meas. range)	1.4 (depending on the meas. range; see: max. meas. range vs. ϵ_r diagram)		
Resolution	1 mm (0.04 inch)			
Temperature error (as per EN 61298-3)	0.05% FSK / 10 °C (50 °F) (-20 °C ... +60 °C [-4 °F ... +140 °F])			
Power supply	20 V – 36 V DC (2)			
Output	Digital communication	4 – 20 mA + HART®		
	Display	–	SAP-300 graphical display unit	
Measuring frequency	10 – 60 sec as per the application settings			
Antenna diameter	38 mm (1½"), 48 mm (2"), 75 mm (3"), 148 mm (6")			
Antenna material	Horn, Parabolic: 1.4571 (316Ti) stainless steel; enclosure: PP, PTFE			Horn, Parabolic: 1.4571 (316Ti); enclosure: PTFE
Process temperature	-30 °C ... +100 °C (-22 °F ... +212 °F), (up to 120 °C (248 °F) for max. 2 minutes) with PP antenna enclosure: max.: 80 °C (+176 °F)			-30 °C ... +180 °C (-22 °F ... +356 °F)
Maximal process pressure	25 bar (363 psig) at 120 °C (248 °F); with plastic antenna enclosure: 3 bar (44 psig) at 25 °C (77 °F)			
Ambient temperature	-20 °C ... +60 °C (-4 °F ... +140 °F)			
Process connection	Threaded, Flanged or Sanitary connections (as per order codes)			
Ingress protection	IP68		IP67	
Electrical connection	LiYCY type. 2x 0.5 mm ² (AWG20) shielded Ø6 mm (0.25 in) cable; standard cable length: 5 m (16.5 ft) (can be ordered up to 30 m (100 ft))		2x M20 x1.5 cable glands + internal thread for 2x ½" NPT cable protective pipe, cable outer diameter: Ø7 – Ø13 mm (0.3 – 0.5 inch), wire cross section: max. 1.5 mm ² (AWG 15)	
Electrical protection	Class III			
Housing material	Plastic (PP)	Plastic (PBT)	Paint coated aluminium or stainless steel	
Sealing	Viton®, EPDM			
Communication certifications	R&TTE, FCC			
Mass	1 – 1.6 kg (2.2 – 3.5 lb)		Aluminium: 2 – 2.6 kg (4.4 – 5.7 lb) Stainless steel: 3.3 – 3.9 kg (7.9 – 8.6 lb)	Aluminium: 2.7 – 3.3 kg (6.6 – 7.9 lb) Stainless steel: 4 – 4.6 kg (8.8 – 10 lb)








(1) Under reference conditions of reflection and stabilized temperature. (2) In case of FM devices see Special Data table.

SPECIAL DATA OF THE ANTENNA VARIATIONS

Type	WQM / WQS / WQK-14□	WQM / WQS / WQK-15□	WQM / WQS / WQK-18□	WQM / WQS / WQK-11□
Name	DN40 (1½") stainless steel horn antenna	DN50 (2") stainless steel horn antenna	DN80 (3") stainless steel horn antenna with flange	DN150 (6") stainless steel parabolic antenna
Process connection	1½" BSP, NPT	2" BSP, NPT	DN80, DN150 flanges	DN150 flange
Material of wetted parts	1.4571 (316Ti), PTFE; in case of WPM: 1.4571 (316Ti), PTFE, PP			1.4571, PTFE
Beam angle	19°	16°	11°	6°
Dead zone	0.2 m (0.65 ft)			0.4 m (1.3 ft)

Type	WPM-1A□	WQP-14□	WQP-15□	WQM / WQS / WQK-14□ + WAT-14T-0	WQM / WQS / WQK-14□ + WAT-14R-0
Name	PP enclosed Planar antenna	DN40 (1½") PP or PTFE encapsulated antenna	DN50 (2") PP or PTFE encapsulated antenna	Sanitary type DN40 (1½") horn antenna with PTFE antenna enclosure	
Housing	Plastic			Plastic / Paint coated aluminium / Stainless steel	
Process connection	2" BSP, NPT	1½" BSP, NPT	2" BSP, NPT	2" TriClamp	DN50 Milch
Material of wetted parts	PP	PP or PTFE		1.4571 (316Ti), PTFE	
Dead zone	0.2 m (0.66 ft)	0.3 m (1 ft)			

APPROVALS

	FM Canada, Certificate No.:FM17CA0074X
	FM US, Certificate No.:FM17US0134X
	BKI ATEX, Certificate No.:BKI13ATEX0017X/2
	BKI IECEx, Certificate No.:IECEx BKI 13.0005issue No.:1
	Ex Russia, Certificate No.:RU C-HU.MF62.B.04401
	INMETRO, Certificate No.:DNV 15.0065 X
	Certificate No.:S7W-WES100



SPECIAL DATA FOR EX CERTIFIED MODELS

Type		Plastic housing, integrated WPM-100-0	Plastic housing, compact WOM-100-0	Metal housing WOS-100-0 WOK-100-0	High temperature version with metal housing WHO-100-0, WJO-100-0
Ex marking	IEC Ex	Ex ia IIB T6 ... T5 Ga	Ex ia IIB T6 ... T5 Ga/Gb	Ex ia IIB T6 ... T4 Ga Ex ia IIIC T85°C ... T110°C Da/Db Ex ta/tb IIIC T85°C ... T110°C Da/Db	Ex ia IIB T6 ... T3 Ga Ex ia IIIC T85°C ... T180°C Da/Db Ex ta/tb IIIC T85°C ... T180°C Da/Db
	ATEX	⊕ II 1 G Ex ia IIB T6 ... T5 Ga	⊕ II 1/2 G Ex ia IIB T6 ... T5 Ga/Gb	⊕ II 1 G Ex ia IIB T6 ... T4 Ga ⊕ II 1/2 D Ex ia IIIC T85°C ... T110°C Da/Db ⊕ II 1/2 D Ex ta/tb IIIC T85°C ... T110°C Da/Db ⊕ II 1/2 G Ex d [ia Ga] IIB T6 ... T4 Ga/Gb	⊕ II 1 G Ex ia IIB T6 ... T3 Ga ⊕ II 1/2 D Ex ia IIIC T85°C ... T180°C Da/Db ⊕ II 1/2 D Ex ta/tb IIIC T85°C ... T180°C Da/Db ⊕ II 1/2 G Ex d [ia Ga] IIB T6 ... T3 Ga/Gb
Intrinsically safe data		L _i : 200 μH, C _i : 30 nF, U _i : 30 V, I _i : 140 mA, P _i : 1 W		L _i : 200 μH, C _i : 16 nF, U _i : 30 V, I _i : 140 mA, P _i : 1 W	
Power supply		Ex ia: 20 V – 30 V DC, Ex d[ia]: 24 V – 36 V DC			
Ambient temperature		-20 °C ... +60 °C (-4 °F ... +140 °F)			
Electrical connection		In case of WPM type: LiYCY type. 2x 0.5 mm ² (AWG20) shielded Ø6 mm (0.25 in) cable; standard cable length: 5 m (16.5 ft) (can be ordered up to 30 m (100 ft))	2x M20 x1.5 metal cable glands, cable outer diameter: Ø7 – Ø13 mm (0.3 – 0.5 inch), wire cross section: max. 1.5 mm ² (AWG 15)		

SPECIAL DATA FOR FM AND CSA CERTIFIED MODELS

Type		WOS-100-A	WOS-100-B
Marking	US	Class I, Division 1, Group C, D, T6 Ta = -20°C to +60°C, IP67	Class I, Division 2, Group C, D, T6 Ta = -20°C to +60°C, IP67
	Canada	Class I, Division 1, Group C, D, T6 Ta = -20°C to +60°C, IP67	Class I, Division 2, Group C, D, T6 Ta = -20°C to +60°C, IP67
Suitable for hazardous locations		Class I Division 1 Groups C & D Class I Division 2 Groups C & D	Class I Division 2 Groups C & D
Electrical connection		NPT 1/2" conduit entry; plug-in type terminal blocks for 0.75 to 1.5 mm ² (16 to 18 AWG) wire cross section	
Power supply		24 V – 36 V DC	

INMETRO APPROVAL NO.: DNV 15.0065 X

Type	Plastic housing, compact WOM-1000-0	High temperature version with metal housing WH0-1000-0 WJ0-1000-0
Ex marking (ATEX)	Ex ia IIB T6...T5 Ga/Gb	Ex ia IIB T6...T3 Ga
		Ex ia IIIC T85°C...T180°C Da/Db
		Ex ta IIIC T85°C...T180°C Da/Db
Intrinsically safe data	L _i : 200 μH C _i : 16 nF U _i : 30 V I _i : 140 mA P _i : 1 W	L _i : 200 μH C _i : 16 nF U _i : 30 V I _i : 140 mA P _i : 1 W



POLARIZATION

The **PiloTREK** pulse burst radar level transmitters emit linearly polarized microwave impulses. The polarization plane of the emitted impulses can be rotated fully in case of **W0S**, **W0M** and the **W0K** types. The rotation of the polarization plane can minimize unwanted false reflections from disturbing objects or from the tank wall. The orientation of the polarization plane coincides with the line drawn between the cable glands.



DIMENSIONS

Integrated housing	Compact housing				
	Plastic (PP)	Plastic (PBT)	Paintcoated aluminium	Stainless steel	Dual compartment
	Plastic (PP) process connection	Stainlesssteel process connection	High temperature type with heatsink		

Plastic PP or PTFE antenna enclosure		Stainless steel horn antenna		Sanitary type with PTFE antenna enclosure		Stainless steel DN80 horn antenna with flange	Parabolic antenna with DN150 flange	Planar antenna
DN40	DN50	DN40	DN50	2" TRICLAMP	DN50 MILCH			

PiloTREK TRANSMITTERS IN HART MULTIDROP LOOP



The **MultiCONT** can handle digital data coming from HART® capable **NIVELCO** transmitters (e.g. level, temperature, pressure, pH, dissolved oxygen, etc.). The digital (HART®) information is processed, displayed and transmitted via RS485 communication line to a PC when needed. Remote programming of the transmitters is also possible. Visualisation on PC can be accomplished with **NIVISION** process visualisation software.

ORDER CODES (NOT ALL COMBINATIONS AVAILABLE)

PiloTREK Pulse Burst Radar level transmitters

PiloTREK W ■ ■ - 1 ■ ■ - ■ (1)

Version	Code
Transmitter	E
Transmitter + display	G
High temperature transmitter (2)	H
High temperature transmitter + display (2)	J
Integrated	P

Antenna / Housing material	Code
Stainless steel antenna / Aluminium housing	S
Stainless steel antenna / Plastic housing	M
Stainless steel antenna / Stainless steel housing	K
PP encapsulated antenna / Plastic housing (3, 4)	P

Antenna Ø / Process connection size	Code
DN40 Horn / 1½"	4
DN50 Horn / 2"	5
DN80 Horn / Flange	8
DN150 Parabolic / Flange (5)	1
Planar / 2"	A

Output / Haz. rating	Code
4 – 20 mA + HART®	4
4 – 20 mA + HART® / Ex	8
4 – 20 mA + HART® / XP-IS Class I Div 1	A
4 – 20 mA + HART® / NI Class I Div 2	B
4 – 20 mA + HART® / Ex d [ia]	C

ANTENNA ENCLOSURES (6)

Process connection	Code	Processconnection	Code	Processconnection	Code		
BSP	0	1.4571 (316 Ti) stainless steel flanges	DN80 PN25	2	PP plastic flanges	DN80	6
NPT	N		DN100 PN25	3		DN100	7
			DN125 PN25	4		DN125	8
			DN150 PN25	5		DN150	9
			3" RF 150 psi	A		3" FF	E
			4" RF 150 psi	B		4" FF	F
			5" RF 150 psi	C		5" FF	G
			6" RF 150 psi	D		6" FF	H
			JIS 10K80A	J		JIS 80A	P
			JIS 10K100A	K		JIS 100A	R
		JIS 10K125A	L	JIS 125A	S		
		JIS 10K150A	M	JIS 150A	T		

Material	Size	Type	Order code
PP	1½"	BSP	WAP-140-0
		NPT	WAP-14N-0
	2"	BSP	WAP-150-0
		NPT	WAP-15N-0
PTFE	2"	TRICLAMP	WAT-14T-0
		DN50 MILCH	WAT-14R-0
	1½"	BSP	WAT-140-0
		NPT	WAT-14N-0
2"	BSP	WAT-150-0	
	NPT	WAT-15N-0	

(1) The order code of an Ex version should end in "Ex"
 (2) Only with metal housing
 (3) Only with threaded process connection and DN40, DN50 antenna diameter
 (4) Ex version not available
 (5) Ex version is under approval
 (6) Only available for BSP threaded instrument and only available to order together with the instrument. Cannot be ordered with Ex version instrument!

